

MINIATURE TYPE

7S Model




Miniature Model

- Ultra Micro Encoer :
OD7.2mm, Height10.5mm.
- High Resolution :
Up to 400 resolution.




Model


7S- -2MC-50-00E

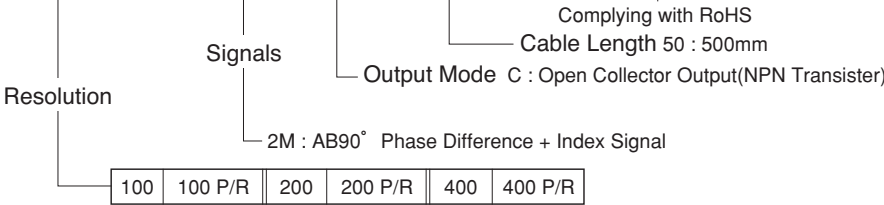

External Dimension

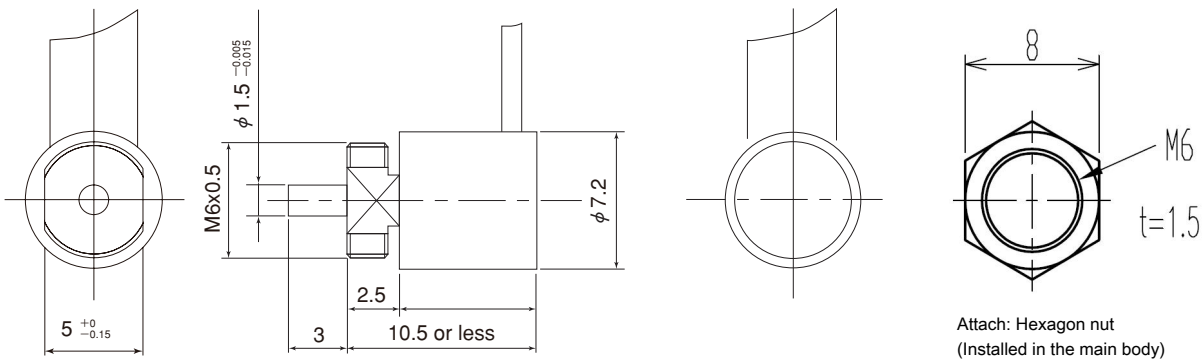

Output Circuit

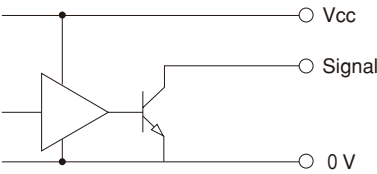


Electrical Spec

Power Supply(Vcc)	DC 4.5 to 5.5V (Ripple 100mV(P-P))
Current Consumption	30mA Max
Output Mode	Open Collector
Output Voltage	[H] — [L] : 0.4V Max
Pull-up voltage	13.2V Max
Maximum Sink Current	20mA
Maximum Frequency Response	100kHz
Rise & Fall Time	1 μs Max

Electrical Connections

No.	Color	Signal
1	Red	Vcc
2	White	0V
3	Blue	Sig B
4	White	Sig A
5	Blue	Sig Z

Wave Form

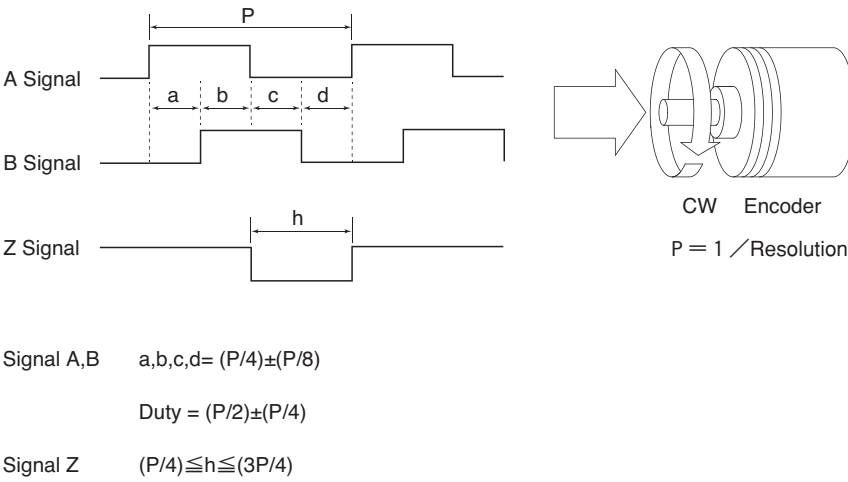

Mechanical Spec

Starting Torque		3.0×10 ⁻⁴ N·m Max
Angular Acceleration		1×10 ⁵ rad/s ²
Shaft Loading	Thrust	0.98N
	Radial	1.90N
Moment of Inertia		1×10 ⁻⁹ kg·m ²
Maximum Permissible Speed		6000min ⁻¹
Net Weight		5g Max (Without Cable)

Environmental Spec

Operating Temperature	−10°C~+80°C
Storage Temperature	−20°C~+80°C
Humidity	RH90% Max No Condensation
Vibration	55 Hz / 1.5mm X,Y,Z Each 2h
Shock	490m/s ² X, Y, Z Each 3 times